

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 986 037 A1

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
15.03.2000 Bulletin 2000/11

(21) Application number: 99906541.0

(22) Date of filing: 01.03.1999

(51) Int. Cl.⁷: G08B 13/24

(86) International application number:
PCT/JP99/00978

(87) International publication number:
WO 99/49437 (30.09.1999 Gazette 1999/39)

(84) Designated Contracting States:
DE FR GB

(30) Priority: 24.03.1998 JP 7521798
21.12.1998 JP 36318398

(71) Applicant:
Mitsubishi Materials Corporation
Chiyoda-ku, Tokyo 100-004 (JP)

(72) Inventors:
• SOE, Takeshi
Mitsubishi Materials Corporation
Omiya-shi Saitama 330-8508 (JP)


• MIYAKE, Masami
Mitsubishi Materials Corporation
Omiya-shi Saitama 330-8508 (JP)
• NAKAZATO, Minoru
Mitsubishi Materials Corporation
Omiya-shi Saitama 330-8508 (JP)
• ISHIYAMA, Kouichi
Mitsubishi Materials Corporation
Omiya-shi Saitama 330-8508 (JP)

(74) Representative:
Türk - Gille - Hrabal - Struck
Patentanwälte - European Patent Attorneys,
Brucknerstrasse 20
40593 Düsseldorf (DE)

(54) **THEFT PREVENTIVE TAG AND METHOD FOR ATTACHING THE SAME**

(57) The resonance frequency of a resonant circuit section (14) does not change even if the surface of an article whose theft is monitored is formed of any material. An antitheft tag (12) mounted on the article (11) whose theft is monitored includes a resonant circuit section (14) resonating with the radio wave having a particular frequency and transmitted from a transmitting antenna. An electromagnetic shield layer (16) formed of an insulating material is interposed between the mounting surface of the article (11) and the resonant circuit section (14). The electromagnetic shield layer (16) may be formed of ferrite powder or soft magnetic powder which has a particle size of 10 μm or less and plastic or rubber or may be formed by laminating a first layer composed of a composite material and a second layer composed of plastic or rubber. Preferably, the soft magnetic powder is any of amorphous alloy, Permalloy, soft magnetic iron, silicon steel, Sendust alloy and Fe-Al alloy.

Fig. 1

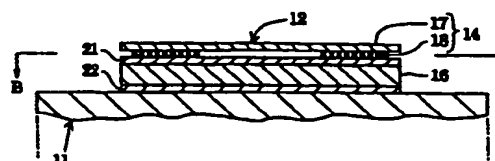

11/ ARTICLE
12/ TAG
14/ RESONANT CIRCUIT SECTION
16/ ELECTROMAGNETIC SHIELD LAYER

EP 0 986 037 A1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a tag for notifying that an article the theft of the which is monitored is taken out without permission and to a method of mounting the tag.

2. Description of the Related Art

[0002] Conventionally, there is disclosed, as this type of antitheft tags, an antitheft tag arranged such that the resonant circuit section of a tag mounted on an article whose theft is monitored is in resonance with the radio wave having a particular frequency and transmitted from a radio wave transmitter, a separation sensing means senses whether or not the tag is separated from the article whose theft is monitored and a separation notifying unit controls a notifying sound output means based on the sensed output from the separation sensing means (Japanese Unexamined Patent Publication No. 8-185584). In the antitheft tag, the resonant circuit section is composed of conductive metal foils having a predetermined shape which are formed on both the sides of an insulating dielectric thin film by etching or the like. For example, a dielectric circuit portion and a capacitor circuit portion are formed on the front surface of the thin film as a front surface flat pattern. The dielectric circuit portion is composed of a conductive metal foil and formed to a swirl shape, and the capacitor circuit portion is formed so as to continue to the center of the swirl of dielectric circuit portion. The separation sensing means is a removal sensing switch having an actuating lever which projects to the surface of the tag on which the tag is mounted. A power supply and a buzzer are electrically connected to the sensing switch. The separation notifying unit is a circuit composed of the removal sensing switch, the power supply and the buzzer which acts as the notifying sound output means. When the tag is mounted on the article, the actuating lever is pressed by the article, whereby the removal sensing switch is turned off. Whereas, when the tag is removed from the article, the actuating lever projects, whereby the removal sensing switch is turned on.

[0003] Further, a transmitting antenna and a receiving antenna stand at a predetermined interval at the entrance and the exit of a shop where the article whose theft is monitored is sold. These antennas are electrically connected to a controller. The controller causes the transmitting antenna to transmit a radio wave having a frequency with which the resonant circuit section resonates as well as checks the signal level of the signal received by the receiving antenna at all times. Further, a speaker for issuing a warning is connected to the control output of the controller.

[0004] In the antitheft tag arranged as described above, when the article whose theft is monitored is going to pass between the transmitting antenna and the receiving antenna regardless of that the price for it is not paid, the receiving antenna receives a signal whose receiving level is modulated because the radio wave transmitted from the transmitting antenna is resonated by the resonant circuit section of the tag mounted on the article whose theft is monitored. As a result, the controller issues a warning from the speaker so that the taking-out of the article whose price is not paid can be checked. In contrast, when the tag is removed from the article, the sensing switch is turned on by the projection of the actuating lever and the buzzer is sounded. Thus, the theft of the article can be reliably monitored.

[0005] However, in the conventional antitheft tag, when the tag is mounted on an article whose surface is formed of a conductive material such as aluminum and the like or a ferromagnetic material such as a steel sheet and the like, the resonance frequency of the resonant circuit section is changed and the tag is not resonated sometimes as compared with a case that the tag is mounted on an article whose surface is formed of an insulating material and a non-magnetic material because the self-inductance of the resonant circuit section changes.

[0006] An object of the present invention is to provide an antitheft tag having a resonant circuit section whose resonance frequency does not change depending upon the material of the surface of an article whose theft is monitored and a method of mounting the antitheft tag.

[0007] Another object of the present invention is to provide an antitheft tag whose thickness can be reduced and which can be made at a low cost and a method of mounting the antitheft tag.

SUMMARY OF THE INVENTION

[0008] An invention according to a first aspect of the invention relates to the improvement of an antitheft tag which is mounted on an article, the theft of which is monitored and which includes a resonant circuit section resonating with the radio wave having a particular frequency and transmitted from a transmitting antenna.

[0009] The characteristic arrangement of the invention resides in that an electromagnetic shield layer is interposed between the mounting surface of the article and the resonant circuit section.

[0010] In the antitheft tag, when the resonant circuit section is mounted on the article whose surface is formed of a

conductive material such as aluminum or the like or a ferromagnetic material such as steel sheet or the like through the electromagnetic shield layer, the resonant circuit section is electromagnetically shielded from the article by the electromagnetic shield layer. Accordingly, the self-inductance of the resonant circuit section does not almost change from the self-inductance thereof when it is mounted on an article whose surface is formed of an insulating material or a non-magnetic material.

[0011] In the antitheft tag, a high conductivity layer may be interposed between the mounting surface of the article and the electromagnetic shield layer.

[0012] In the antitheft tag, the resonant circuit section is electromagnetically shielded from the article by the electromagnetic shield layer as well as the Q value of the resonant circuit section is increased by the high conductivity layer.

As a result, the self-inductance of the resonant circuit section does not almost change and a resonant width is made sharp. In addition, the thickness of the electromagnetic shield layer can be greatly reduced by interposing the thin high conductivity layer and further the tag can be made at a low cost. Note that the Q value is a value defined by $\omega L/r$ when an angular frequency is represented by ω and the resistance component of the resonant circuit section is represented by r . It is known that a loss caused by an eddy current and the like is reduced and the resonant width is made sharp by a higher Q value. Further, a reason why the Q value is increased by interposing the high conductivity layer as described above is that the self-inductance L of the resonant circuit section is not almost changed by the material of the article located just below the high conductivity layer. This is because the electromagnetic wave transmitted from the transmitting antenna is shielded by the high conductivity layer and does not reach the article located just below the high conductivity layer.

[0013] In the antitheft tag, the electromagnetic shield layer may be formed of an insulating material.

[0014] In the antitheft tag, when the resonant circuit section is mounted on the article whose surface is formed of a conductive material such as aluminum or the like or a ferromagnetic material such as the steel sheet or the like through the electromagnetic shield layer, the resonant circuit section is electromagnetically shielded from the article by the electromagnetic shield layer while being space apart therefrom by a predetermined interval which corresponds to the thickness of the electromagnetic shield layer. As a result, the self-inductance of the resonant circuit section does not almost change from that when the resonant circuit section is mounted on the article whose surface is formed of an insulating material or a non-magnetic material.

[0015] In the antitheft tag, the electromagnetic shield layer may be composed of a composite material of ferrite powder and plastic or rubber.

[0016] Ferrite is an oxide represented by a chemical formula $MO \cdot Fe_2O_3$ when bivalent metal ions are represented by M . It is known that the ferrite generally has a very high electric resistance and high magnetic permeability. Note that Mn , Mg , Ni , Co , Cu and Zn are exemplified as the bivalent metal ions, and the ferrite powder may be sintered ferrite powder obtained by pulverizing sintered ferrite.

[0017] Used as plastic in which the ferrite powder is dispersed is thermoplastic resin such as polyvinyl chloride resin, polyethylene resin, ABS resin, polypropylene resin, polyester resin, polyamide resin, fluororesin and the like and thermosetting resin such as epoxy resin, phenol resin, silicone resin, urethane resin and the like. Further, the resin in which the powder is dispersed is not limited thereto and natural rubber or synthetic rubber may be used.

[0018] In the antitheft tag, the electromagnetic shield layer may be composed of a composite material of soft magnetic powder which has a particle size of $10 \mu m$ or less and plastic or rubber.

[0019] The particle size of the soft magnetic powder must be $10 \mu m$ or less because it is blended with or dispersed in the plastic or the rubber to prevent an eddy current from being occurred in the soft magnetic powder by the radio wave transmitted from a transmission antenna. The particle size is preferably $5 \mu m$ or less and more preferably $3 \mu m$ or less.

[0020] In the antitheft tag, when the resonant circuit section is mounted on the article whose surface is formed of the conductive material such as the aluminum or the like or the ferromagnetic material such as the steel sheet or the like through the electromagnetic shield layer, the resonant circuit section is electromagnetically shielded from the article by the ferrite powder or the soft magnetic powder having a high permeability and contained in the electromagnetic shield layer. Accordingly, even if the thickness of the electromagnetic shield layer is reduced, the self-inductance of the resonant circuit section does not almost change from that when it is mounted on the article whose surface is formed of the insulating material or the non-magnetic material.

[0021] In the antitheft tag, the electromagnetic shield layer may be formed by laminating a first layer composed of a composite material of ferrite powder or soft magnetic powder which has a particle size of $10 \mu m$ or less and plastic or rubber and a second layer composed of plastic or rubber.

[0022] In the antitheft tag, the second layer acts as an insulating layer. When the resonant circuit section is mounted on the article whose surface is formed of the conductive material such as the aluminum or the like or the ferromagnetic material such as the steel sheet or the like through the electromagnetic shield layer, the self-inductance of the resonant circuit section does not almost change from that when the resonant circuit section is mounted on the article whose surface is formed of the insulating material or the non-magnetic material while the thickness of the electromagnetic shield layer is reduced as well as the amount of the ferrite powder or the soft magnetic powder used is reduced.

[0023] In the antitheft tag, the soft magnetic powder may be composed of any of amorphous alloy, Permalloy, soft magnetic iron, silicon steel, Sendust alloy and Fe-Al alloy.

[0024] Used as the amorphous alloy is highly permeable material of cobalt, iron, nickel and the like. The amorphous alloy contains Co, Fe and Ni in an amount of 70 - 98 wt% in total, B, Si and P in an amount of 2 - 30 wt% in total and Al, Mn, Zr, Nb and the like in addition to the above.

[0025] Exemplified as specific examples of the cobalt alloy are an alloy composed of 84 wt% of Co, 5.3 wt% of Fe, 8.5 wt% of Si and 2.2 wt% of B, an alloy composed of 84 wt% of Co, 3.3 wt% of Fe, 1.3 wt% of B, 9.8 wt% of P, and 1.6 wt% of Al, an alloy composed of 89 wt% of Co, 5.3 wt% of Fe, 2.3 wt% of Si, 3.4 wt% of B, an alloy composed of 81.9 wt% of Co, 5.1 wt% of Fe, 10 wt% of Si and 3 wt% of B, an alloy composed of 80 wt% of Co, 10 wt% of Fe, 6 wt% of Si and 4 wt% of B, and an alloy composed of 78.8 wt% of Co, 5.1 wt% of Fe, 6.1 wt% of Si, 4.7 wt% of B and 5.3 wt% of Ni.

[0026] Exemplified as specific examples of the iron alloy are an alloy composed of 95.4 wt% of Fe and 4.6 wt% of B, an alloy composed of 91.4 wt% of Fe, 5.9 wt% of Si and 2.7 wt% of B, and the like.

[0027] Exemplified as specific examples of the nickel alloy are an alloy composed of 94.5 wt% of Ni and 5.5 wt% of P, and the like.

[0028] Used as the Permalloy are 78-Permalloy, 45-Permalloy, Hipernik, Monimax, Sinimax, Radiometal, 1040 Alloy, Mumetal, Cr-Permalloy, Mo-Permalloy, Super malloy, Hardperm, 36-Permalloy, Deltamax, square hysteresis Permalloy, JIS PB types 1 and 2, JIS PC types 1 to 3, JIS PD types 1 and 2, JIS PE types 1 and 2, and the like.

[0029] Used as the soft magnetic iron are industrial pure iron, Armco iron, Cioffi pure iron, low carbon steel and the like.

[0030] Used as the silicon steel are non-directional silicon steel, directional silicon steel, and the like.

[0031] Used as the Sendust alloy and the Fe-Al alloy are alperm, hypermal, Sendust, super Sendust, and the like.

[0032] When the above insulating materials are used as the insulating layer in the antitheft tag according to the seventh aspect of the invention, the resonant circuit section can be reliably magnetically shield from the article whose surface is formed of the conductive material or the ferromagnetic material because they have high magnetic permeability, small coercive force, and a small hysteresis loss.

[0033] In the antitheft tag, the high conductivity layer may be formed of a non-magnetic material having an electric resistivity of $10^{-2} \Omega \cdot \text{cm}$ or less.

[0034] In the antitheft tag, the high conductivity layer may be formed of any of an aluminum sheet, a copper sheet, an aluminum foil, an ITO film and a silver thick film.

[0035] In the antitheft tag, since the high conductivity layer is formed of the non-magnetic aluminum sheet or the like which has high conductivity, the Q value can be increased.

[0036] An invention according to a second aspect of the invention is a method of mounting the antitheft tag according to the first aspect of the invention on an article whose theft is monitored using the front surface of the electromagnetic shield layer of the tag as the surface to be mounted on the article.

[0037] With this method, the antitheft tag can be properly mounted on the article whose theft is monitored without being affected by the article.

[0038] In the method, the antitheft tag may be mounted on the article whose theft is monitored using the front surface of the high conductivity layer of the tag as the surface to be mounted on the article.

[0039] With this method, the antitheft tag can be more properly mounted on the article whose theft is monitored without being affected by the article as compared with the antitheft tag wherein the high conductivity layer may be formed of any of an aluminum sheet, a copper sheet, an aluminum foil, an ITO film and a silver thick film.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040]

Fig. 1 is a sectional view taken along the line A - A of Fig. 2 showing an antitheft tag of a first embodiment of the present invention.

Fig. 2 is a sectional view taken along the line B - B of Fig. 1.

Fig. 3 is a view showing a state that an article on which the tag is mounted passes between a transmitting antenna and a receiving antenna.

Fig. 4 is a plan view showing a resonant circuit section in the embodiment 1.

Fig. 5 is a sectional view taken along the line C - C of Fig. 6 showing a second embodiment of the present invention.

Fig. 6 is a sectional view taken along the line D - D of Fig. 5.

Fig. 7 is a view corresponding to Fig. 3 and shows a state that an article on which the tag is mounted passes between a transmitting antenna and a receiving antenna.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

- [0041] A first embodiment of the present invention will be described based on the drawings.
- [0042] As shown in Fig. 1 to Fig. 3, a tag 12 mounted on an article 11 whose theft is monitored includes a resonant circuit section 14 and an electromagnetic shield layer 16. The resonant circuit section 14 is in resonance with the radio wave having a particular frequency and transmitted from a transmitting antenna 13, and the electromagnetic shield layer 16 is interposed between the article 11 and the resonant circuit section 14. In the embodiment, the article 11 is drink water, cooking oil, candies or the like accommodated in a vessel 11a made of a steel sheet which is a ferromagnetic material. The resonant circuit section 14 comprises an insulating base sheet 17, a coil portion 18 and a capacitor 19. The insulating base sheet 17 is formed of an insulating material such as a paper, a plastic thin sheet or the like, the coil portion 18 is formed of a conductive material such as copper, aluminum or the like to an approximately square swirl shape on one of the surfaces of the insulating base sheet 17, the coil portion 18 bonded to the one of the surfaces of the insulating base sheet 17, and the capacitor 19 is bonded to the one of the surfaces of the insulating base sheet 17 and electrically connected to the coil portion 18 (Figs. 1 and 2). The capacitor 19 is composed of a pair of electrode layers 19a bonded to each other through a dielectric layer (not shown). The coil portion 18 is formed by winding an insulated conductive wire to an approximately square swirl shape and bonding it to the insulating base sheet 17. Alternatively, the coil portion 18 is made of a conductive material such as an aluminum foil, a copper foil or the like laminated on the insulating base sheet 17 and formed to an approximately square swirl shape by removing an unnecessary portion therefrom by etching, punching or the like.
- [0043] The electromagnetic shield layer 16 is formed of an insulating material such as a styrol sheet or an acrylic sheet or the like or formed of a composite material of ferrite powder and plastic or rubber or a composite material of soft magnetic powder having a particle size of 10 μm or less and plastic or rubber. The formation of the electromagnetic shield layer 16 of the composite material permits the reduction of the thickness thereof. When the electromagnetic shield layer 16 is formed of the insulating material, it is preferable that the thickness thereof is within the range of 5 mm - 10 mm, whereas when the electromagnetic shield layer 16 is formed of the composite material, it is preferable that the thickness thereof is within the range of 3 mm - 5 mm. Further, the electromagnetic shield layer 16 may be formed by laminating a first layer composed of the composite material and a second layer composed of plastic or rubber. When the electromagnetic shield layer 16 is formed by laminating the first layer and the second layer, the thickness of the first layer can be reduced as well as the amount of the ferrite powder or the soft magnetic powder used can be reduced.
- [0044] Note that, preferably, the composite material of the first layer and the second layer, the thickness of the first layer can be reduced as well as the amount of the ferrite powder or the soft magnetic powder used can be reduced. When the electromagnetic shield layer 16 is formed by laminating the first layer and the second layer, it is preferable that the thicknesses of the first and second layers are within the ranges of 2 to 4 mm and 2 - 5 mm, respectively.
- [0045] Note that, preferably, the composite material of the first layer and the second layer, the thickness of the first layer can be reduced as well as the amount of the ferrite powder or the soft magnetic powder used can be reduced. When the electromagnetic shield layer 16 is formed by laminating the first layer and the second layer, it is preferable that the thicknesses of the first and second layers are within the ranges of 2 to 4 mm and 2 - 5 mm, respectively.
- [0046] Note that, preferably, the composite material of the first layer and the second layer, the thickness of the first layer can be reduced as well as the amount of the ferrite powder or the soft magnetic powder used can be reduced. When the electromagnetic shield layer 16 is formed by laminating the first layer and the second layer, it is preferable that the thicknesses of the first and second layers are within the ranges of 2 to 4 mm and 2 - 5 mm, respectively.
- [0047] Note that, preferably, the composite material of the first layer and the second layer, the thickness of the first layer can be reduced as well as the amount of the ferrite powder or the soft magnetic powder used can be reduced. When the electromagnetic shield layer 16 is formed by laminating the first layer and the second layer, it is preferable that the thicknesses of the first and second layers are within the ranges of 2 to 4 mm and 2 - 5 mm, respectively.
- [0048] Note that, preferably, the composite material of the first layer and the second layer, the thickness of the first layer can be reduced as well as the amount of the ferrite powder or the soft magnetic powder used can be reduced. When the electromagnetic shield layer 16 is formed by laminating the first layer and the second layer, it is preferable that the thicknesses of the first and second layers are within the ranges of 2 to 4 mm and 2 - 5 mm, respectively.

receives the radio wave transmitted from the transmitting antenna 13 and resonates therewith. At the time, since the resonant circuit section 14 is electromagnetically shielded from the steel sheet vessel 11a of the article 11 by the electromagnetic shield layer 16, the self-inductance of the resonant circuit section 14 does not almost change. As a result, a radio wave having a frequency which is predetermined by the self-inductance of the coil portion 18 and the capacitance of the capacitor 19 is re-emitted from the resonant circuit section 14. When the receiving antenna 23 receives the re-emitted radio wave, the speaker 26 sounds and issues a warning because the controller 24 senses that the article 11 whose price is not paid is taken out without permission based on the received signal.

[0049] In contrast, when payment is made to the article 11, the capacitor 19 of the resonant circuit section 14 is broken by a strong radio wave emitted to the tag 12 at an accounting counter (not shown). As a result, even if the article 11 passes between the transmitting antenna 13 and the receiving antenna 23, the controller 24 does not sound the speaker 26 because the resonant circuit section 14 does not resonate.

[0050] Figs. 5 and 6 show a second embodiment of the present invention. The same numerals as used in Figs 1 and 2 are used to denote the same parts in Figs. 5 and 6.

[0051] In the second embodiment, a high conductivity layer 55 is interposed between the mounting surface of an article 11 and an electromagnetic shield layer 56. The high conductivity layer 55 is bonded between the mounting surface of the article 11 and the electromagnetic shield layer 56 through an adhesive layer (not shown). The high conductivity layer 55 has an electric resistivity of $10^{-2} \Omega \cdot \text{cm}$ or less (conductivity is larger than 10^4 S/m or more) as well as is formed to a sheet-, foil-, or film-shape. Specifically, it is preferable that the high conductivity layer 55 is formed of an aluminum sheet, a copper sheet, an aluminum foil, an ITO film, a silver thick film or the like. Further, the thickness of the high conductivity layer 55 is preferably within the range of 0.1 - 1.0 mm when it is formed of the aluminum sheet or the copper sheet, preferably within the range of 10 - 100 μm when it is formed of the aluminum foil or the silver thick film, and preferably within the range of 1 - 10 μm when it is formed of the ITO film. In the specification, the aluminum sheet and the copper sheet include not only a sheet and a foil formed of aluminum but also a sheet and a foil formed of Al alloy mainly composed of aluminum, and the copper sheet includes not only a sheet formed of copper but also a sheet formed of copper alloy mainly composed of copper. Further, the ITO film is a transparent highly conductive thin film which is formed of indium tin oxide composed of In_2O_3 to which about 8 - 12 mol% of SnO_2 is added.

[0052] In the second embodiment, the electromagnetic shield layer 56 is formed by laminating a first layer 56a and a second layer 56b. The first layer 56a is composed of a composite material which is composed of ferrite powder or soft magnetic powder which has a particle size of 10 μm or less and plastic or rubber, and the second layer 56b is composed of plastic or rubber. Note that the electromagnetic shield layer 56 may be formed of an insulating material such as a styrol sheet, an acrylic sheet or the like. Otherwise, it may be formed of a composite material of ferrite powder and plastic or rubber or formed of soft magnetic powder which has a particle size of 10 μm or less and plastic or rubber.

[0053] In the electromagnetic shield layer 56 formed by laminating the first layer 56a and the second layer 56b, the thickness of the first layer 56a can be more reduced than that of the electromagnetic shield layer of the first embodiment by the existence of the high conductivity layer, whereby the amount of the ferrite powder or the soft magnetic powder used can be reduced. When the electromagnetic shield layer 56 is formed by laminating the first layer 56a and the second layer 56b, preferably, the thicknesses of the first layer 56a and the second layer 56b are within the ranges 0.5 - 3 mm and 1 - 3 mm, respectively. Further, the formation of the electromagnetic shield layer is formed of the insulating material, the thickness thereof to be reduced. When the electromagnetic shield layer is formed of the insulating material, the thickness thereof is preferably within the range of 5 - 10 mm, whereas when the electromagnetic shield layer is formed of the composite material, the thickness thereof is preferably within the range of 1 - 3 mm.

[0054] Note that the content of the ferrite powder or the soft magnetic powder in the first layer 56a and the second layer 56b can be made smaller than that in the first embodiment by the existence of the high conductivity layer, and it is preferable to form the first layer 56a or the composite material by blending and solidifying the ferrite powder or the soft magnetic powder in the range of 80 - 95 wt% and the plastic or the rubber in the range of 5 - 20 wt%. Further, the capacitor 59 of a resonant circuit section 54 is disposed in a coil portion 58 and includes first and second electrode layers 59a and 59b and a dielectric layer 59c interposed therebetween. The second embodiment is arranged similarly to the first embodiment except the above arrangement.

[0055] Operation of an antitheft tag 52 arranged as described above will be described based on Figs. 5 - 7.

[0056] When the article 11, on which the tag 52 is mounted, is caused to pass between a transmitting antenna 13 and a receiving antenna 23 so that it is taken out from a shop without permission, the resonant circuit section 54 of the tag 52 receives the radio wave transmitted from the transmitting antenna 13 and resonates therewith. At the time, since the resonant circuit section 54 is electromagnetically shielded from the steel sheet vessel 11a of the article 11 by the electromagnetic shield layer 56 and the Q value of the resonant circuit section 54 is increased thereby, the self-inductance of the resonant circuit section 54 does not almost change, whereby a resonant width is made sharp. As a result, a radio wave having a frequency which is predetermined by the self-inductance of the coil portion 58 and the capacitance of the capacitor 59 is re-emitted from the resonant circuit section 54. Since the operation of the second embodiment other than the above is the same as that of the first embodiment, the description thereof is not repeated again.

[0057] Note that while the drink water, cooking oil and candies accommodated in the steel sheet vessel as a ferromagnetic material are exemplified as the article in the first and second embodiments, the embodiments are also applicable to the drink water or the like accommodated in an aluminum vessel as a conductive material or to an article formed of an insulating material, a non-magnetic material and any other material. When the article is a book, the tag of the present invention can be bonded to a sales slip by an adhesive. When the book is bought by paying the price for it, the sales slip is removed therefrom at an accounting counter. Thus, the speaker issues no warning even if the book is caused to pass between the transmitting antenna and the receiving antenna.

[0058] While the coil portion is formed to the approximately square swirl shape in the first and second embodiments, it may be formed to an approximately circular swirl shape or other swirl shape.

[0059] Further, the electromagnetic shield layer is mounted on the surface of the article through the adhesive layer in the first and second embodiments, it may be mounted on the surface of the article through an adhesive tape having an adhesive agent applied to both the sides thereof.

[0060] Next, examples of the present invention will be described in detail together with comparative examples.

(Example 1)

[0061] A resonant circuit section 14 shown in Fig. 4 was formed. That is, an insulating base sheet 17 was prepared which was composed of a thin polyethylene of 5 cm long and 5 cm wide and had aluminum foils bonded on both the sides thereof by an adhesive. A coil portion 31 having a first electrode portion 31a and a first terminal portion 31b at the internal end and the external end thereof were printed to the aluminum foil of one of the surfaces of the polyethylene using an etching resistant paint by silk screen. A terminal section 32 having a second electrode portion 32a and a second terminal portion 32b, which confronted the first electrode portion 31a and the first terminal portion 31b at both the ends thereof, were printed to the aluminum foil of the other surface of the polyethylene by the silk screen as shown by the broken line in the figure. Etching was performed after the paint was dried. Subsequently, the first terminal portion 31b was caused to come into contact with the second terminal portion 32b under pressure by compressing and breaking the polyethylene therebetween, whereby the resonant circuit section 14 was formed by forming a capacitor 19 by the first terminal portion 31b and the second terminal portion 32b.

[0062] A tag was obtained by bonding an electromagnetic shield layer composed of a styrol sheet as an insulating material which was 5 cm long, 5 cm wide and 1 cm thick. The tag 1 was referred to as an example 1.

(Example 2)

[0063] Although not shown, Ni-Zn sintered ferrite was pulverized in a mortar and ground in a ball mill. Subsequently, Ni-Zn sintered ferrite powder was prepared by causing the thus ground Ni-Zn sintered ferrite to pass through a sieve having a particle size of 10 μm . 90 wt% of the powder and 10 wt% of an epoxy resin were sufficiently blended in a small amount of acetone and put into a mold, and an electromagnetic shield layer composed of an epoxy resin sheet, which was 5 cm long, 5 cm wide and 5 mm thick and in which the ferrite powder was dispersed, was obtained. A tag was obtained by bonding the electromagnetic shield layer to the resonant circuit section obtained in the example 1. The tag was referred to as an example 2.

(Example 3)

[0064] Although not shown, 90 wt% of soft magnetic iron powder having an average particle size of 2 μm and 20 wt% of an epoxy resin were sufficiently blended in a small amount of acetone and put into a mold, and an electromagnetic shield layer composed of an epoxy resin sheet, which was 5 cm long, 5 cm wide and 5 mm thick and in which soft magnetic iron powder was dispersed, was obtained. A tag was obtained by bonding the electromagnetic shield layer to the resonant circuit section obtained in the example 1. The tag was referred to as an example 3.

(Example 4)

[0065] Although not shown, an epoxy resin sheet, which was 5 cm long, 5 cm wide and 3.5 mm thick and in which ferrite powder was dispersed, was obtained by a procedure similar to that of the example 2. An electromagnetic shield layer composed of a laminated body was obtained bonding a styrol sheet, which was 5 cm long, 5 cm wide and 3 mm thick, to the resin sheet. A tag was obtained by bonding the electromagnetic shield layer to the resonant circuit section obtained in the example 1. The tag was referred to as an example 4.

(Example 5)

[0066] A resonant circuit section was made to a shape similar to that of the example 1. A first layer was not used in an electromagnetic shield layer and an acrylic sheet as an insulating material which was 5 cm long, 5 cm wide and 10 mm thick was used as the second layer of the electromagnetic shield layer. The electromagnetic shield layer was bonded to the resonant circuit section. Further, an aluminum sheet which was 5 cm long, 5 cm wide and 0.3 mm thick was used as a high conductivity layer. A tag was obtained by bonding the high conductivity layer to the front surface of the electromagnetic shield layer. The tag was referred to as an example 5.

(Example 6)

[0067] A resonant circuit section was made to a shape similar to that of the example 1. A second layer was not used in an electromagnetic shield layer and a Ni-Zn ferrite composite material was used as the first layer of the electromagnetic shield layer. The composite material was made by sufficiently blending 80 wt% of Ni-Zn sintered ferrite powder, which was ground to a particle size of 10 μm or less, and 20 wt% of an epoxy resin in a small amount of acetone, putting them in a mold and solidifying them therein. The size of the composite material was 5 cm long, 5 cm wide and 2 mm thick. The electromagnetic shield layer was bonded to the resonant circuit section. A high conductivity layer was made of a material similar to that of the high conductivity layer of the example 5 and formed to a shape similar to the shape thereof. A tag was obtained by bonding the high conductivity layer to the front surface of the electromagnetic shield layer. The tag was referred to as an example 6.

(Example 7)

[0068] A tag similar to that of the example 6 except that a high conductivity layer was made of a copper sheet which was 5 cm long, 5 cm wide and 0.3 mm thick. The tag was referred to as an example 7.

(Example 8)

[0069] A tag similar to that of the example 6 except that a high conductivity layer was made of an aluminum foil which was 5 cm long, 5 cm wide and 15 μm thick was made. The tag was referred to as an example 8.

(Example 9)

[0070] A tag similar to that of the example 6 except that a high conductivity layer was made of a silver thick film which was 5 cm long, 5 cm wide and 10 μm thick was made. The tag was referred to as an example 9.

(Example 10)

[0071] A tag similar to that of the example 6 except that a high conductivity layer was made of an ITO film which was 5 cm long, 5 cm wide and 10 μm thick was obtained. The tag was referred to as an example 10.

(Example 11)

[0072] A tag similar to that of the example 6 except that an electromagnetic soft iron composite material was used as the first layer of an electromagnetic shield layer was made. The tag was referred to as an example 11. Note that the electromagnetic soft iron composite material was made by sufficiently blending 80 wt% of soft magnetic iron powder, which was ground to a particle size of 10 μm or less, and 20 wt% of an epoxy resin in a small amount of acetone, putting them in a mold and solidifying them therein. The size of the composite material was 5 cm long, 5 cm wide and 2 mm thick.

(Example 12)

[0073] A tag was made similarly to the example 6 except that an acrylic sheet was interposed between the first layer of an electromagnetic shield layer and a high conductivity layer as the second layer of the electromagnetic shield layer. The tag was referred to as an example 12. The size of the second layer was 5 cm long, 5 cm wide and 1 mm thick.

(Comparative example 1)

[0074] Although not shown, a tag composed of only the electromagnetic shield layer obtained in the example 1 was referred to as a comparative example 1.

(Comparative example 2)

[0075] Although not shown, a tag was made similarly to the example 5 except that the second layer of an electromagnetic shield layer was not used. The tag was referred to as a comparative example 2.

(Comparative example 3)

[0076] A tag was made similarly to the example 5 except that no high conductivity layer was used. The tag was referred to as a comparative example 3. However, Ni-Zn sintered ferrite powder and epoxy resin were 60 wt% and 40 wt%, respectively.

(Comparative example 4)

[0077] A tag was made similarly to the example 11 except that no high conductivity layer was used. The tag was referred to as a comparative example 4. However, soft magnetic iron powder and epoxy resin were 60 wt% and 40 wt%, respectively.

(Comparative example 5)

[0078] A tag was made similarly to the example 12 except that no high conductivity layer was used. The tag was referred to as a comparative example 5. However, Ni-Zn sintered ferrite powder and epoxy resin were 60 wt% and 40 wt%, respectively.

(Comparison test 1 and evaluation)

[0079] The resonant circuit sections of the tags of the examples 1 - 4 were bonded on aluminum sheets of 6 cm long, 6 cm wide and 0.3 mm thick through electromagnetic shield layers, and the resonant circuit section of the comparative example 1 was bonded directly on an aluminum sheet having the same size without interposing an electromagnetic shield layer therebetween. These tags were caused to pass between a transmitting antenna, which transmits a radio wave with which the resonant circuit sections resonate, and a receiving antenna standing at a predetermined interval, respectively. Then, it was confirmed whether a speaker connected to the control output of a controller issued a warning or not.

[0080] As a result, a warning was issued in the tags of the examples 1 - 4, while no warning was issued in the tag of the comparative example 1. It is contemplated that this is because the self-inductance of the resonant circuit sections did not almost change in the examples 1 - 4, although a self-inductance changed in the tag of the comparative example 1 because the tag was bonded on the aluminum sheet. Note that the types and thicknesses of the electromagnetic shield layers of the examples 1 - 4 and the comparative example 1 are shown in Table - 1.

Table - 1

	Electromagnetic shield layer		High conductivity layer (Thickness)	Detection rate (%)		
	First layer (Thickness)	Second layer (Thickness)		Frequency 5MHz	Frequency 8MHz	Frequency 10MHz
Example 1	nil	Styrol sheet (10mm)	nil	-	-	-
Example 2	Ferrite composite material (5mm)	nil	nil	-	-	-
Example 3	Soft magnetic iron composite material (5mm)	nil	nil	-	-	-
Example 4	Ferrite composite material (3.5mm)	Styrol sheet (3mm)	nil	-	-	-
Example 5	nil	Acrylic sheet (10mm)	Aluminum sheet (0.3mm)	36	35	33
Example 6	Ferrite composite material (2mm)	nil	Aluminum sheet (0.3mm)	69	68	67
Example 7	Ferrite composite material (2mm)	nil	Copper sheet (0.3mm)	64	64	63
Example 8	Ferrite composite material (2mm)	nil	Aluminum foil (15 μ m)	64	64	63
Example 9	Ferrite composite material (2mm)	nil	Silver thick film (10 μ m)	61	61	59
Example 10	Ferrite composite material (2mm)	nil	ITO film (10 μ m)	61	61	59
Example 11	Soft magnetic iron composite material (2mm)	nil	Aluminum sheet (0.3mm)	59	59	55
Example 12	Ferrite composite material (2mm)	Acrylic sheet (1mm)	Aluminum sheet (0.3mm)	69	69	68
Comparative Example 1	nil	nil	nil	0	0	0
Comparative Example 2	nil	nil	Aluminum sheet (0.3mm)	0	0	0
Comparative Example 3	Ferrite composite material (2mm)	nil	nil	0	0	0
Comparative Example 4	Soft magnetic iron composite material (2mm)	nil	nil	0	0	0
Comparative Example 5	Ferrite composite material (2mm)	Acrylic sheet (1mm)	nil	0	0	0

[0081] In Table - 1, a "ferrite composite material" shows a "Ni-Zn ferrite composite material".

(Comparative test 2 and evaluation)

[0082] Respective ones of antitheft tags 52 made by the examples 5 - 12 and the comparative examples 1 - 5 were prepared and bonded on laminated boxes 11 (boxes of 175 x 65 mm x 30 mm on which foils mainly composed of aluminum were laminated) as articles whose theft was monitored at the corners of one surfaces thereof. Further, a transmitting antenna (300 mm wide x 1670 mm high) 13 and a receiving antenna (300 mm wide x 1670 mm high) 23 were disposed at an interval of 900 mm and a radio wave having a predetermined frequency was oscillated from the transmitting antenna.

[0083] In contrast, the space between both the antennas was divided into 25 small spaces 61 as shown by the two-dot-and-dash-line of Fig. 7. In this state, the respective laminated boxes 11 provided with the tags were caused to pass between both the antennas 13, 23 so that they pass through the respective small spaces 61. At the time, the tag 25 was caused to pass through one small space 61 three times by changing the direction thereof so that it is perpendicular to X-, Y- and Z-axes. That is, each laminated box 11 provided with the tag was caused to pass between both the antennas 13 and 23 while changing the positions where it passes as well as changing the direction of the tag 52 75 times in total. Then, whether the tag 52 could be sensed or not when it passed between the antennas 13 and 23 was measured and a tag sensing rate (%) was calculated. Table - 1 shows the result of the calculation. Note that the frequency of the radio wave oscillated from the transmitting antenna was changed to 5 MHz, 8 MHz and 10 MHz. In addition, Table - 1 shows the types and thicknesses of the electromagnetic shield layers and the high conductivity layers of the tags of the exam-

ples 5 - 12 and the comparative examples 1 - 5.

[0084] As apparent from Table - 1, the tags of the comparative examples 2 - 6 could not be sensed at all, whereas 33 - 69 % of the tags of the examples 5 - 12 could be sensed. As a result, the characteristics of the tags could be greatly improved.

[0085] Note that it is contemplated that a reason why any of the tag sensing rates of the comparative examples 3 - 5 was zero is that the electromagnetic shielding function of the tags was lowered because the thickness of the electromagnetic shield layer (2 mm when only the first layer was employed and 2 mm + 1 mm when the first layer and the second layer were employed) was too thin regardless of that no high conductivity layer was provided or because the content of the ferrite powder or the soft magnetic iron powder was too small (60 wt%).

[0086] As described above, according to the present invention, the antitheft tag, which is mounted on an article whose theft is monitored, includes the resonant circuit section which is in resonance with the radio wave having the particular frequency and transmitted from the transmitting antenna. Since the electromagnetic shield layer, which is composed of the insulating material or the composite material or which is formed by laminating the first layer composed of the composite material and the second layer composed of the plastic or the like, is interposed between the mounting surface of the article and the resonant circuit section, the resonant circuit section is electromagnetically shielded by the electromagnetic shield layer while being space apart from the article by the predetermined interval which corresponds to the thickness of the electromagnetic shield layer. As a result, the self-inductance of the resonant circuit section does not almost change. That is, the resonance frequency of the resonant circuit section is approximately the same as that when the antitheft tag is mounted on an article the surface of which is formed of an insulating material or a non-magnetic material.

[0087] Further, when the high conductivity layer is interposed between the mounting surface of the article and the electromagnetic shield layer, the resonant circuit section is electromagnetically shielded from the article by the electromagnetic shield layer as well as the Q value of the resonant circuit section can be increased. As a result, the self-inductance of the resonant circuit section does not almost change as well as a resonant width is made sharp. Further, since the thickness of the electromagnetic shield layer can be greatly reduced by interposing the thin high conductivity layer, the thickness of the tag can be reduced as a whole as well as the tag can be made at a low cost.

[0088] In particular, when the electromagnetic shield layer contains the soft magnetic powder having a particle size of 10 μm or less, the occurrence of an eddy current can be suppressed in the electromagnetic shield layer even if the frequency of the radio wave transmitted from the transmitting antenna is high. Consequently, the thickness of the electromagnetic shield layer can be reduced without almost changing the self-inductance of the resonant circuit section. When the electromagnetic shield layer is interposed which is formed by laminating the first layer and the second layer, the thickness of the first layer (composite material) can be reduced and the amount of the ferrite powder or the soft magnetic powder used can be decreased, whereby a less expensive tag can be provided.

[0089] Further, when the soft magnetic powder is used and it is composed of any of the amorphous alloy, Permalloy, soft magnetic iron, silicon steel, Sendust alloy and Fe-Al alloy, the resonant circuit section can be electromagnetically shielded reliably from the article the surface of which is formed of the conductive material or the ferromagnetic material because the magnetic permeability of these insulating materials is large, the coercive force thereof is small and the hysteresis loss thereof is small.

[0090] When the high conductivity layer is used and it is formed of the non-magnetic material having the electric resistivity of $10^{-2} \Omega \cdot \text{cm}$ or less such as the aluminum sheet, copper sheet, ITO film or silver thick film, the Q value can be increased because the high conductivity layer has high electric conductivity and is non-magnetic.


[0091] Further, when the tag having no high conductivity layer is mounted on the article whose theft is monitored using the front surface of the electromagnetic shield layer as the surface to be mounted on the article and when the tag having the high conductivity layer is mounted on the article whose theft is monitored using front surface of the high conductivity layer as the surface to be mounted on the article, the tags can be properly mounted on the article without being affected thereby.

Claims

1. An antitheft tag which is mounted on an article (11) the theft of which is monitored and which includes a resonant circuit section (14, 54) resonating with the radio wave having a particular frequency and transmitted from a transmitting antenna (13), characterized in that an electromagnetic shield layer (16, 56) is interposed between the mounting surface of the article (11) and the resonant circuit section (14, 54).
2. An antitheft tag according to claim 1, characterized in that a high conductivity layer (55) is interposed between the mounting surface of the article (11) and the electromagnetic shield layer (56).

3. An antitheft tag according to claim 1 or 2,
characterized in that the electromagnetic shield layer (16, 56) is formed of an insulating material.
- 5 4. An antitheft tag according to claim 1 or 2,
characterized in that the electromagnetic shield layer (16, 56) is composed of a composite material of ferrite powder
and plastic or rubber.
- 10 5. An antitheft tag according to claim 1 or 2,
characterized in that the electromagnetic shield layer (16, 56) is composed of a composite material of soft magnetic
powder which has a particle size of 10 μm or less and plastic or rubber.
- 15 6. An antitheft tag according to claim 1 or 2,
characterized in that the electromagnetic shield layer (16, 56) is formed by laminating a first layer (56a) composed
of a composite material of ferrite powder or soft magnetic powder which has a particle size of 10 μm or less and
plastic or rubber and a second layer (56b) composed of plastic or rubber.
- 20 7. An antitheft tag according to claim 5 or 6,
characterized in that the soft magnetic powder is composed of any of amorphous alloy, Permalloy, soft magnetic
iron, silicon steel, Sendust alloy and Fe-Al alloy.
- 25 8. An antitheft tag according to claim 2,
characterized in that the high conductivity layer (55) is formed of a non-magnetic material having an electric resis-
tivity of $10^{-2} \Omega \cdot \text{cm}$ or less.
- 30 9. An antitheft tag according to claim 8,
characterized in that the high conductivity layer (55) is formed of any of an aluminum sheet, a copper sheet, an alu-
minum foil, an ITO film and a silver thick film.
- 35 10. A method of mounting the antitheft tag (12) according to any of claims 1 and 3 to 7 on an article (11), characterized
in that the antitheft tag (12) is mounted on the article using the front surface of the electromagnetic shield layer (16)
of the tag (12) as the surface to be mounted on the article (11).
- 40 11. A method of mounting an antitheft tag (52) according to any of claims 2, 8 and 9 on an article (11), characterized
in that the antitheft tag (12) is mounted on the article using the front surface of the high conductivity layer (55) of
the tag (52) as the surface to be mounted on the article (11).
- 45
- 50
- 55

Fig. 1

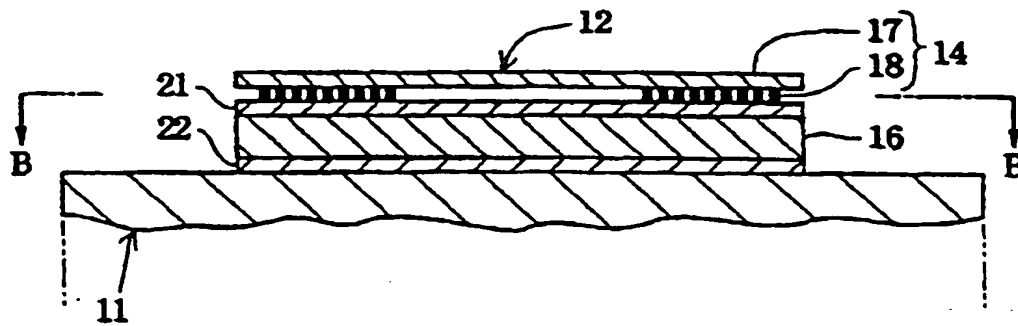

11/ ARTICLE

12/ TAG

14/ RESONANT CIRCUIT SECTION

16/ ELECTROMAGNETIC SHIELD LAYER

Fig. 2


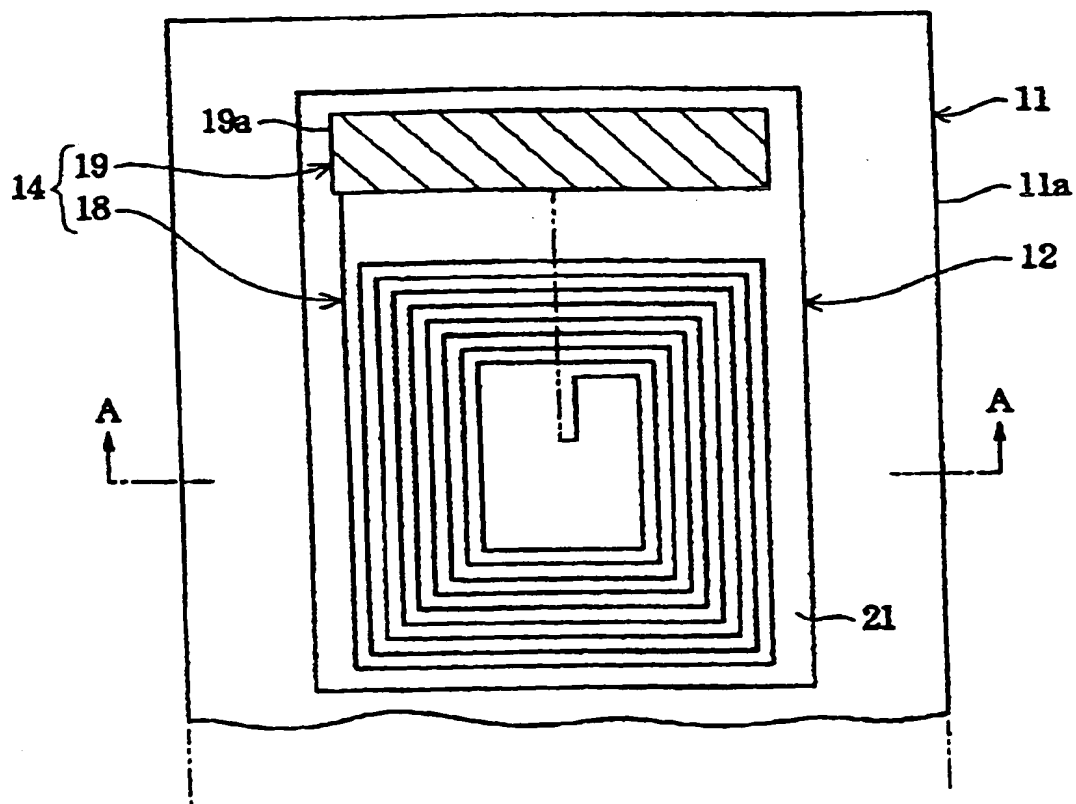


Fig. 3

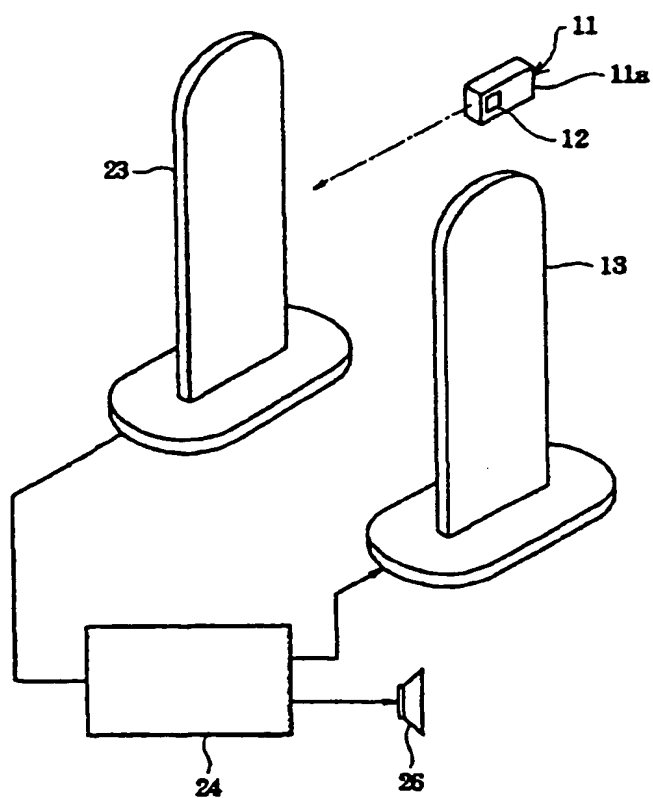

- 11/ ARTICLE
- 12/ TAG
- 13/ TRANSMITTING ANTENNA
- 23/ RECEIVING ANTENNA
- 24/ CONTROLLER
- 26/ SPEAKER

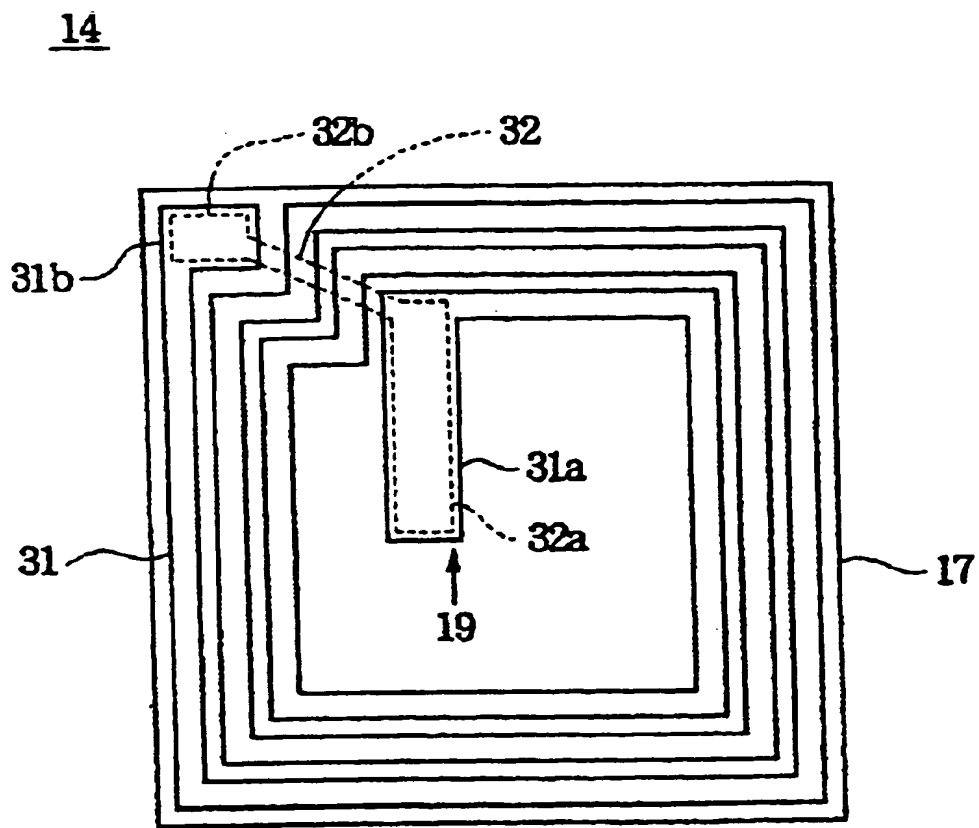


Fig. 4

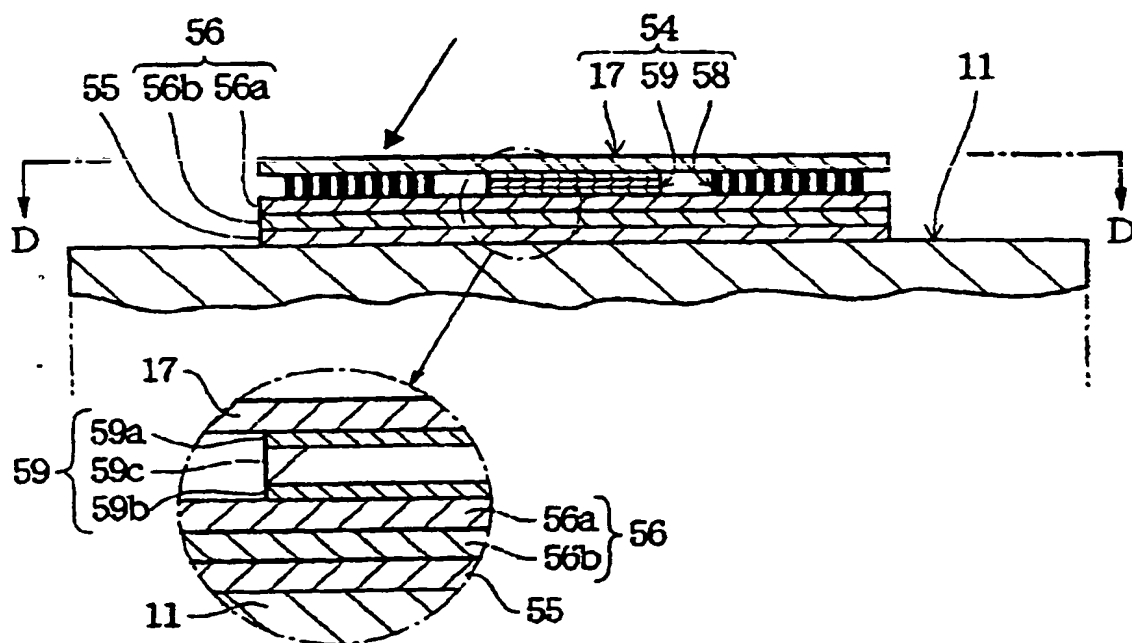


Fig. 5

- 11/ ARTICLE
- 13/ TRANSMITTING ANTENNA
- 52/ TAG
- 54/ RESONANT CIRCUIT SECTION
- 55/ HIGH CONDUCTIVITY LAYER
- 56/ ELECTROMAGNETIC SHIELD LAYER
- 56a/ FIRST LAYER
- 56b/ SECOND LAYER

Fig. 6


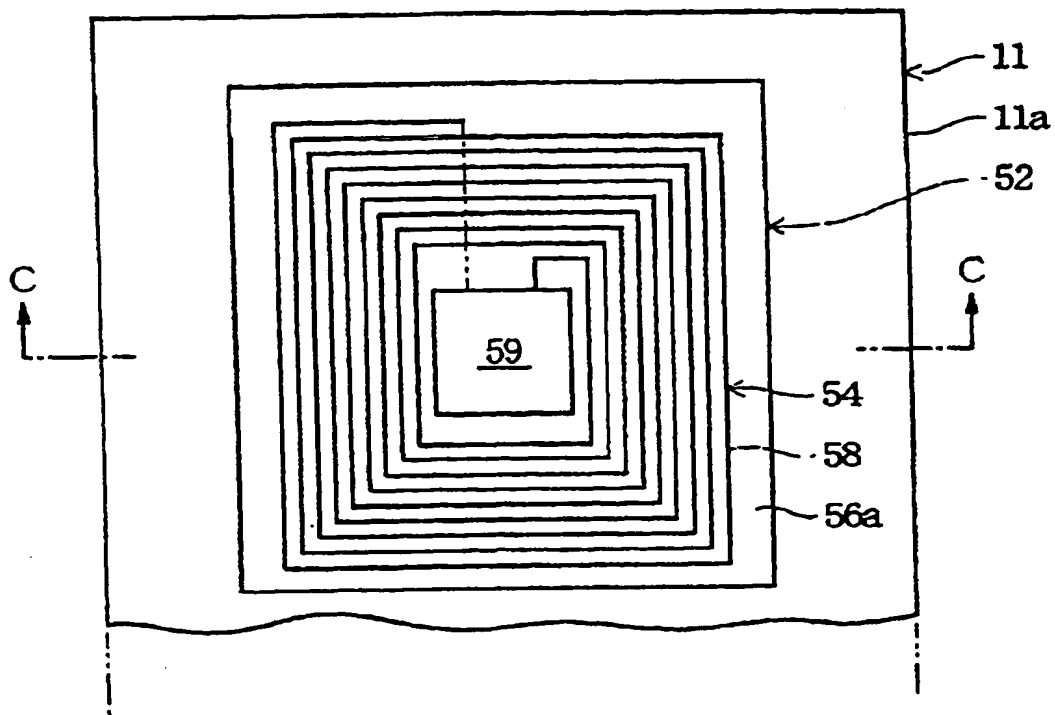


Fig. 7

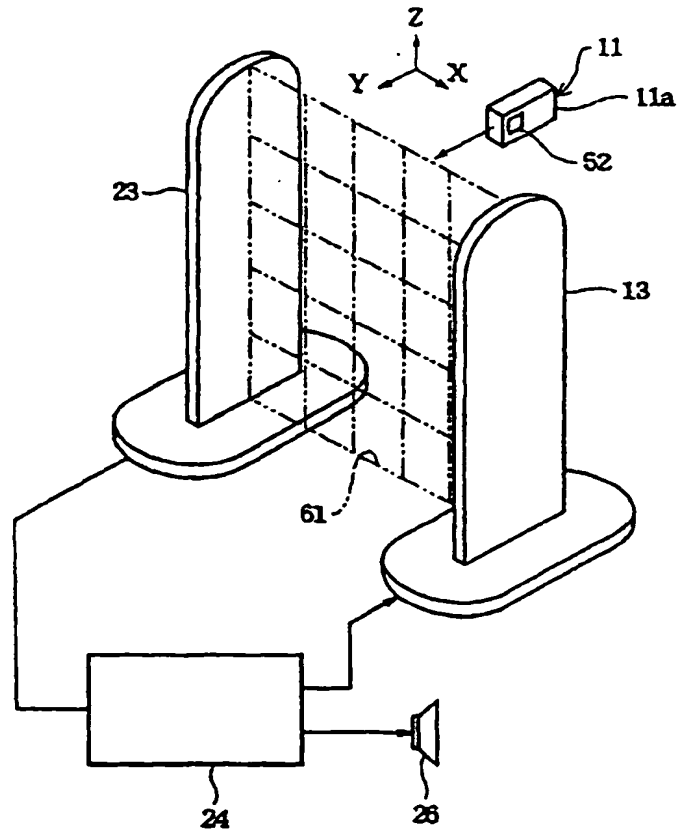

- 11/ ARTICLE
- 12/ TAG
- 13/ TRANSMITTING ANTENNA
- 23/ RECEIVING ANTENNA
- 24/ CONTROLLER
- 26/ SPEAKER
- 61/ SMALL SPACE

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP99/00978

A. CLASSIFICATION OF SUBJECT MATTER
Int.Cl⁶ G08B13/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
Int.Cl⁶ G08B13/24Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-1999
Kokai Jitsuyo Shinan Koho 1971-1999 Jitsuyo Shinan Toroku Koho 1996-1999Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
ECLA G08B13/24B4

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP, 63-72688, U (Sumitomo 3M Ltd.), 16 May, 1988 (16. 05. 88), Full text ; Fig. 1 (Family: none)	1 2-11
Y	JP, 62-60095, A (Minnesota Mining and Manufacturing Co.), 16 March, 1987 (16. 03. 87), Full text & AU, 60501786, A & EP, 215605, A & US, 4745401, A & AU, 583936, B & CA, 1261936, A & EP, 215605, B & DE, 3677439, C & HK, 64491, A	1-11

☒ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

'A' document defining the general state of the art which is not considered to be of particular relevance

'E' earlier document but published on or after the international filing date

'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

'O' document referring to an oral disclosure, use, exhibition or other means

'P' document published prior to the international filing date but later than the priority date claimed

'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

'Z' document member of the same patent family

Date of the actual completion of the international search
30 March, 1999 (30. 03. 99)Date of mailing of the international search report
6 April, 1999 (06. 04. 99)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP99/00978

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 63-133289, A (Monarch Marking Systems, Inc.), 6 June, 1988 (06. 06. 88), Full text & GB, 8722481, A & US, 4717438, A & DE, 3732825, A & AU, 7864387, A & FR, 2604548, A & GB, 2197565, A & BR, 8705001, A & US, 4778552, A & BR, 8704997, A & GB, 8824551, A & US, 4802944, A & BR, 8704998, A & US, 4818312, A & AU, 2378088, A & FR, 2622716, A & DE, 3836480, A & JP, 1-159794, A & US, 4843404, A & GB, 2211702, A & US, 4846922, A & MX, 160465, A & US, 4910499, A & AU, 599418, A & US, 4954814, A & AU, 601628, B & MX, 161383, A & GB, 9017481, A & AU, 5772990, A & GB, 2234885, A & FR, 2604548, B & GB, 2234885, B & GB, 2197565, B & CA, 1289641, A & CA, 1289642, A & GB, 9120851, A & CA, 1294117, A & GB, 2247594, A & FR, 2622716, B & DE, 3836480, C & DE, 3732825, C	1-11
A	US, 5012225, A (Peter Gill et. al.), 30 April, 1991 (30. 04. 91), Abstract (Family: none)	1-11
P, Y	JP, 10-162260, A (Mitsubishi Materials Corp.), 19 June, 1998 (19. 06. 98), Full text (Family: none)	1-11
P, Y	JP, 10-162261, A (Mitsubishi Materials Corp.), 19 June, 1998 (19. 06. 98), Full text (Family: none)	1-11
P, Y	JP, 10-198873, A (Mitsubishi Materials Corp.), 31 July, 1998 (31. 07. 98), Full text (Family: none)	1-11

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.